

125 W SuperLinear® Outdoor TWTA

Built for Outdoor Applications

Rugged, compact and lightweight amplifier designed for outdoor use. Provides a guaranteed 50 W of linear power at the flange over 1000 MHz. A multi-band BUC option is available: users may switch from two different pre-selected frequency ranges each with up to 1 GHz bandwidth.

Cost Effective and Efficient

Mounting at the antenna improves performance through minimized cable losses and saves cost in system design. Employs a high efficiency helix traveling wave tube, reducing operating costs. Consumes 1/5 the prime power of comparable SSPAs, and weighs 35% less.

Rugged, Easy to Maintain, Simple to Operate


Built-in fault diagnostic capability via remote monitor and control. Easy access enclosure for improved serviceability. CAN-Bus architecture improves reliability and improves noise immunity. User-friendly microprocessor-controlled logic with integrated Ethernet computer interface. Digital metering is standard.

Meets Global Requirements

Meets International Safety Standard EN-60215, Electromagnetic Compatibility 2004/108/EC and Harmonic Standard EN-61000-3-2 to satisfy worldwide requirements.

Worldwide Support

Backed by over three decades of satellite communications experience, and CPI's worldwide 24-hour customer support network that includes more than 20 regional factory service centers.

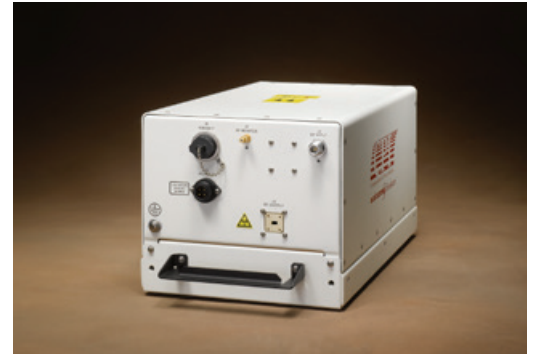

Model TL01K0

125 watt Ka-band outdoor TWTA for satellite uplink applications

OPTIONS

- 1 RU remote control panel
- WR-34 output waveguide
- Block Upconverter - note: for specifications with BUC option, please consult CPI document TD-183
- Multi-band block upconverter (BUC). Contact CPI for specifications
- Serial interface
- Integral linearizer



811 Hansen Way, PO Box 51625
Palo Alto, CA 94303 USA
tel: +1 (650) 846-3803
fax: +1 (650) 424-1744
e-mail: satcommarketing@cpii.com
website: www.cpii.com/satcom

125 W SuperLinear® Ka-Band Outdoor TWTA

Specification	Model TL01K0
Output Frequency	Up to 3500 MHz instantaneous bandwidth within the 27.0 to 31.0 GHz frequency band (multi-band BUC option allows for two different, factory-set frequency ranges, each up to 1 GHz - contact CPI for specs)
TWT Peak Power ¹	125 W (50.97 dBm) min.
Flange Peak/CW Power ¹	100 W/50 W (50.00/47.00 dBm) min.
Flange CW Power (max.)	55 W (47.40 dBm) max.
Intermodulation - with respect to the sum of two carriers	-25 dBc max. at total output power of 47 dBm with optional linearizer (at 44 dBm without linearizer)
Gain	70 dB min.
RF Level Adjust Range	0 to 30 dB (via PIN diode attenuator) typ, 0.1 dB steps
Gain Stability	±0.25 dB/24 hour max, at constant drive and temperature, after 30 minute warmup; ±1.0 dB typ. over operating temperature range
Small Signal Gain Slope	±0.04 dB/MHz max.
Small Signal Gain Variation	1.0 dB pk-pk max. across any 10 MHz segment; 3.0 dB pk-pk max. across any 1 GHz segment
Input/Output VSWR	1.3:1 max.
Load VSWR	1.5:1 max. continuous operation, no degradation; any value for operation without damage
Phase Noise	12 dB below IESS-308 continuous mask; -47 dBc AC fundamental; -50 dBc sum of all spurs
Spurious	-60 dBc max.
AM/PM Conversion	2.5°/dB max. for a single-carrier at 25 W RF output from peak (2.0°/dB max. at 50 W RF output with optional linearizer)
Noise Density	<-150 dBW/4 kHz below 21.2 GHz; <-65 dBW/4 kHz max. in passband; <-60 dBW/4 kHz max. in passband with linearizer option
Harmonic Outputs	-65 dBc max. (RF); -60 dBc max. (IF)
Group Delay (over 40 MHz)	0.01 ns/MHz linear max; 0.001 ns/MHz ² parabolic max; 1.5 ns pk-pk ripple max.
Primary Power	Voltage: Single phase, 100-240 VAC ±10%; Frequency: 47-63 Hz
Power Consumption	400 VA max; 300 VA typ. at 40 W output power
Power Factor	0.95 min; 0.99 typ.
Amplitude and Phase Linearity	Exceeds MIL-STD-188-164B
Ambient Temperature	-40°C to +55°C operating in direct sunlight (to +60°C out of direct sunlight); -54°C to +71°C non-operating
Relative Humidity	100% condensing
Altitude	10,000 ft. with standard adiabatic derating of 2°C/1000 ft. operating; 50,000 ft. non-operating
Shock and Vibration	20 G at 11 ms (1/2 sine pulse in non-operating condition); 2.1 g rms, 50 to 500 MHz
Cooling	Forced Air with integral blower
Connections	RF Input: Type N Female; RF output: WR-28G (WR-34G optional); RF output monitor: 2.9mm SMA Female
M&C Interface	Ethernet (RS232/422/485 serial optional)
Dimensions, W x H x D	10.0 x 8.55 x 17.0 inches (254 x 218 x 432 mm)
Weight	29 lbs (13.2 kg) max. with no options
Heat Dissipation	250 W typ.
Acoustic noise	65 dBA (as measured at 3 ft.) nom.
Note 1	Peak power specs are provided so that desired backoff can more easily be calculated. The amplifier's actual output at the flange, CW power, is 50 W.